




產品物性參考 Product Physical Properties

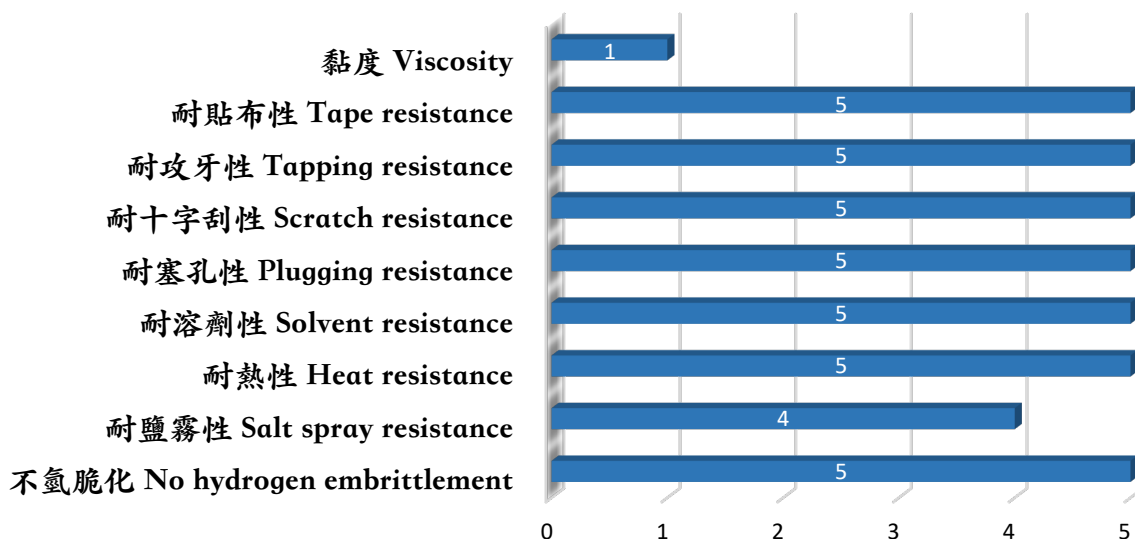

產品特性 Product Features

適用性 applicability	● 水 water-based ○ 油性 solvent-based
塗層 coating	● 底漆 primer ○ 面漆 top-coating
溶解性 solubility	● 水 water ● 醇類 alcohol

● = 適用 applicable ○ = 不適用 not applicable ◎ = 尚可 acceptable

操作說明 Instructions

色相 hue	銀色 silver
稀釋劑 diluents	H2O: AFA-Y-05=1:1
適用之材質 applicable material	碳鋼 carbon steel
作業方式 operation method	噴塗 spraying、刷塗 brushing、浸泡離心 soaking and centrifuge
塗料操作粘度 paint operating viscosity	ZAHN#2 40 秒以上(25°C) 岩田杯 30 秒以上(25°C)
預熱(溫度/時間) preheating (temperature/time)	70-90°C/10-15 分鐘 minutes
烘烤條件(溫度/時間) baking conditions (temperature/time)	320°C/20 分鐘 minutes
儲存條件 storage conditions	<ol style="list-style-type: none"> 1. 貯放陰涼區域避免高溫及陽光照射。 Store in a cool area to avoid high temperature and sunlight. 2. 貯存溫度 25±5°C。 The storage temperature is 25±5°C. 3. 儘量保持密封狀態。 Try to keep it sealed. 4. 操作時，請遠離火源。 Keep away from fire sources during operation.

1. 本司產品說明書之數據皆為實驗室數據，實際數據應以貴司實際操作之數據為準。

The data in the product manual of our company are all laboratory data, and the actual data should be based on the actual data of your company.

2. 客戶如操作及功能應用範圍，超越本司之操作與功能應用規範，請與本司溝通與探討。

If the scope of operation and function application of customers exceeds our operation and function application specifications, please communicate and discuss with our company.

3. 本司產品稀釋劑，應用本司建議種類為準。

The product diluent of our company shall be subject to the type recommended by our company.



公司地址：雲林縣斗六市斗工五路 2-1 號

Company address: No. 2-1, Dougong 5th Road, Douliu City, Yunlin County

網址：<https://www.jentenpaint.com>

Website: <https://www.jentenpaint.com>